



CERTIFICATE OF APPROPRIATENESS

Reviewed by the Houston Archaeological and Historical Commission

ITEM A17
HPO File #: HP2026_0245

September 10, 2026

515 Arlington St.
Houston Heights South

Applicant: William Duncan, agent for Marielle Yilmaz, owner

Property: 515 Arlington St., Block 288, Lot 9 Houston Heights Subdivision. The property is a 2,929 square foot two-story wood frame/brick veneer single-family residence and a detached garage situated on a 6,600 square foot (50' X 132') interior lot.

Significance: Partially contributing, hipped bungalow property constructed circa 1920, located in the Houston Heights South Historic District.

Proposal: Alteration – Window replacement and replace front porch deck boards and handrails

The applicant proposes to...

- Replace 10 windows with Pella Reserve Series wood/clad windows in same style as existing
- Focusing on sashes and remaining opening sides
- Despite appearance, function of the windows lacks efficient ventilation and warped grooves between the jamb liner and the stiles
- Window trim is projected to remain the same
- Replace weak front porch deck boards with appropriate composite material
- Replace 4 wood steps to front porch with reclaimed handmade clay brick from the 1900s, recycled material from Galveston, T.X.
- New craftsman style painted wood handrails and matching spindles
- All new windows need to be inset and recessed. See Attachment A for details.

Public Comment: No public comment received.

Civic Association: No civic association comment received.

Recommendation: Partial Approval: Denial of window replacement, allowance of front porch and railing reinforcement

HAHC Action: -



ITEM A17
HPO File #: HP2026_0245

September 10, 2026

515 Arlington St.
Houston Heights South

APPROVAL CRITERIA

ALTERATIONS, REHABILITATIONS, RESTORATIONS AND ADDITIONS

Sec. 33-241: HAHC shall issue a certificate of appropriateness for the alteration, rehabilitation, restoration or addition of an exterior feature of (i) any landmark, (ii) protected landmark, (iii) any building, structure or object that is part of an archaeological site, or (iv) contributing building in a historic district upon finding that the application satisfies the following criteria, as applicable:

- | S | D | NA | |
|-------------------------------------|--------------------------|--------------------------|---|
| | | | S - satisfies D - does not satisfy NA - not applicable |
| ☒ | ☐ | ☐ | (1) The proposed activity must retain and preserve the historical character of the property; |
| ☒ | ☐ | ☐ | (2) The proposed activity must contribute to the continued availability of the property for a contemporary use; |
| ☒ | ☐ | ☐ | (3) The proposed activity must recognize the building, structure, object or site as a product of its own time and avoid alterations that seek to create an earlier or later appearance; |
| ☒ | ☐ | ☐ | (4) The proposed activity must preserve the distinguishing qualities or character of the building, structure, object or site and its environment; |
| ☒ | ☐ | ☐ | (5) The proposed activity must maintain or replicate distinctive stylistic exterior features or examples of skilled craftsmanship that characterize the building, structure, object or site; |
| ☒ | ☐ | ☐ | (6) New materials to be used for any exterior feature excluding what is visible from public alleys must be visually compatible with, but not necessarily the same as, the materials being replaced in form, design, texture, dimension and scale; |
| ☒ | ☐ | ☐ | (7) The proposed replacement of exterior features, if any, should be based on an accurate duplication of features, substantiated by available historical, physical or pictorial evidence, where that evidence is available, rather than on conjectural designs or the availability of different architectural elements from other structures; |
| ☒ | ☐ | ☐ | (8) Proposed additions or alterations must be done in a manner that, if removed in the future, would leave unimpaired the essential form and integrity of the building, structure, object or site; |
| ☒ | ☐ | ☐ | (9) The proposed design for any exterior alterations or addition must not destroy significant historical, architectural, archaeological or cultural material, including but not limited to siding, windows, doors and porch elements; |
| ☒ | ☐ | ☐ | (10) The proposed alteration or addition must be compatible with the massing, size, scale material and character of the property and the context area; and |
| ☒ | ☐ | ☐ | (11) The distance from the property line to the front and side walls, porches, and exterior features of any proposed addition or alteration must be compatible with the distance to the property line of similar elements of existing contributing structures in the context area. |

HEIGHTS DESIGN GUIDELINES

- | | | | |
|-------------------------------------|--------------------------|--------------------------|---|
| ☒ | ☐ | ☐ | In accordance with Sec. 33-276, the proposed activity must comply with the City Council approved Design Guidelines. |
|-------------------------------------|--------------------------|--------------------------|---|



CERTIFICATE OF APPROPRIATENESS

Reviewed by the Houston Archaeological and Historical Commission

ITEM A17
HPO File #: HP2026_0245

September 10, 2026

515 Arlington St.
Houston Heights South

DISTRICT MAP





CERTIFICATE OF APPROPRIATENESS

Reviewed by the Houston Archaeological and Historical Commission

ITEM A17
HPO File #: HP2026_0245

September 10, 2026

515 Arlington St.
Houston Heights South

INVENTORY PHOTO



CURRENT PHOTO





CERTIFICATE OF APPROPRIATENESS


Reviewed by the Houston Archaeological and Historical Commission

ITEM A17
HPO File #: HP2026_0245

September 10, 2026

515 Arlington St.
Houston Heights South

CONTEXT AREA

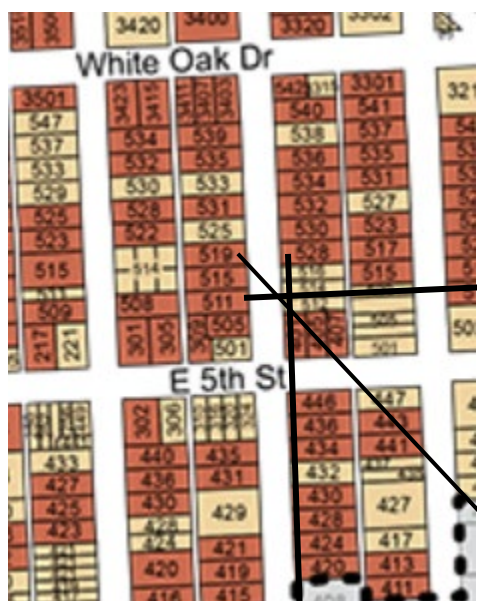

2 STY – 511 ARLINGTON ST.



2 STY- 528 ARLINGTON ST



1 STY – 519 ARLINGTON ST.



CERTIFICATE OF APPROPRIATENESS

Reviewed by the Houston Archaeological and Historical Commission

ITEM A17
HPO File #: HP2026_0245

September 10, 2026

515 Arlington St.
Houston Heights South

EXISTING AND PROPOSED STEPS





CERTIFICATE OF APPROPRIATENESS

Reviewed by the Houston Archaeological and Historical Commission

ITEM A17
HPO File #: HP2026_0245

September 10, 2026

515 Arlington St.
Houston Heights South

PHOTOS OF WINDOWS/FRONT PORCH





CERTIFICATE OF APPROPRIATENESS

Reviewed by the Houston Archaeological and Historical Commission

ITEM A17
HPO File #: HP2026_0245

September 10, 2026

515 Arlington St.
Houston Heights South

PLEASE SEE ATTACHMENTS

DRAFT



Being Lot 9, in Block 288, of Houston Heights, a Subdivision in Harris County, Texas, according to the map or plat thereof recorded in Volume 1-A, Page 114, of the Map Records of Harris County, Texas.




LEGEND

- 1/2" ROD FOUND
 ⊗ 1/2" ROD SET
 ○ 1" PIPE FOUND
 ⊗ "X" FOUND/SET
 ◆ PK NAIL SET
 □ FENCE POST FOR CORNER
 CM CONTROLLING MONUMENT
 AC AIR CONDITIONER
 PE POOL EQUIPMENT
 TE TRANSFORMER PAD
 ■ BRICK COLUMN
 ● POWER POLE
 ▲ UNDERGROUND ELECTRIC
 △ OVERHEAD ELECTRIC
 —OHP—
 OVERHEAD ELECTRIC POWER
 —OES—
 OVERHEAD ELECTRIC SERVICE
 —○—
 CHAIN LINK
 WOOD FENCE 0.5' WIDE TYPICAL
 —||—
 IRON FENCE
 —X—
 BARBED WIRE
 //—
 EDGE OF ASPHALT
 ▲—
 EDGE OF GRAVEL
 [CONCRETE]
 [COVERED AREA]



(ASSUMED BASIS OF BEARINGS)

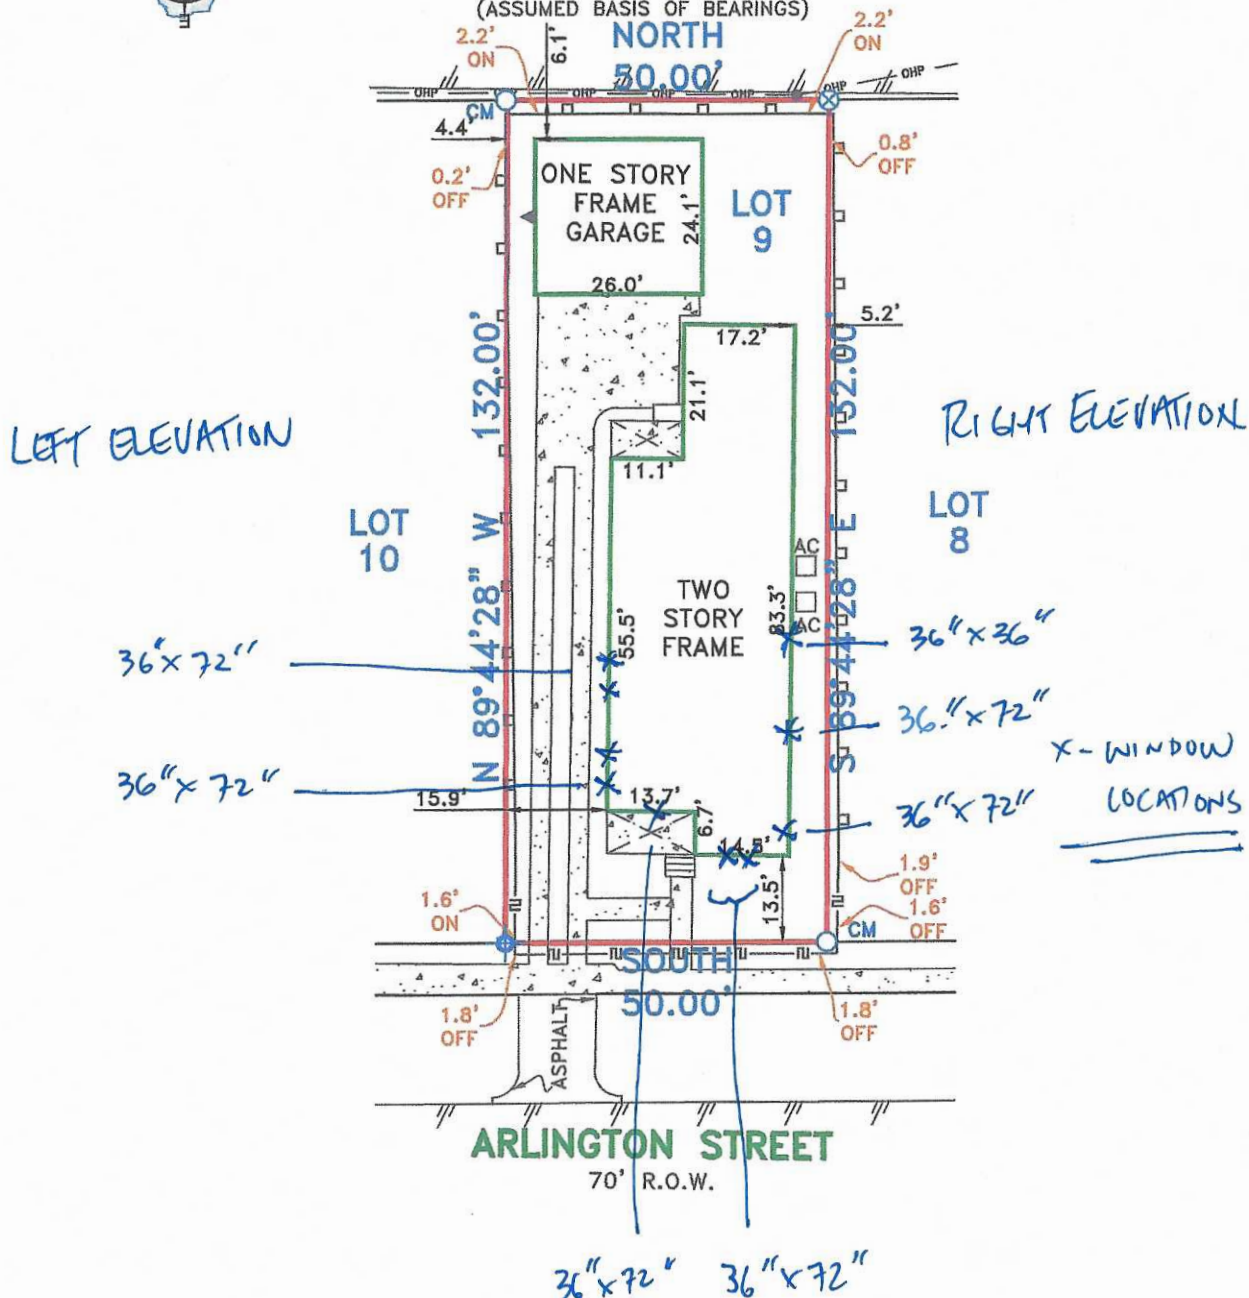

FRONT ELEVATION

EXCEPTIONS:

NOTES:

NOTE: BEARINGS, EASEMENTS AND BUILDING LINES ARE BY RECORDED PLAT UNLESS OTHERWISE NOTED.

FLOOD NOTE: According to the F I D M No 4920100670M Alt: - - - - -

CERTIFICATE OF APPROPRIATENESS

WINDOW WORKSHEET



PLANNING &
DEVELOPMENT
DEPARTMENT

EXISTING WINDOW SCHEDULE

Window	Material	Lite Pattern	Style	Dimensions	Mounting Profile	Original/ Replacement	Existing To Remain	Other
Ex. A1	Wood	1/1	DH	32 x 66	Recessed	Original	No	
A	Wood	1/1	SH	36"x72"	Recessed	Original	No	
B	Wood	1/1	SH	36"x72"	Recessed	Original	No	
C	Wood	1/1	SH	36"x72"	Recessed	Original	No	
D	Wood	1/1	SH	36"x72"	Recessed	Original	No	
E	Wood	1/1	SH	36"x72"	Recessed	Original	No	
F	Wood	1/1	SH	36"x72"	Recessed	Original	No	
G	Wood	1/1	SH	36"x72"	Recessed	Original	No	
H	Wood	1/1	SH	36"x72"	Recessed	Original	No	
I	Wood	1/1	SH	36"x72"	Recessed	Original	No	
J	Wood	1/1	SH	36"x36"	Recessed	Original	No	

DAMAGE TO EXISTING WINDOWS

Window	Broken Glass	Painted Shut	Inoperable/Cut Sash Cords/Weights	Rotten Rails/Stiles	Rotten Sill	Rotten/Broken Frame	Other Damage/ Description
Ex. A1	Y	Y	Y	N	Y	N	Missing Parts
A							
B							
C							

PROPOSED WINDOW SCHEDULE

Window	Material	Lite Pattern	Style	Dimensions	Mounting Profile	Brand or Equivalent	Existing To Remain	Other
Ex. A1	Wood	1/1	DH	32 x 66	Recessed	WindowCo.	No	
A	Wood	1/1	SH	36"x72"	Recessed	Pella	No	Preserve Series
B	Wood	1/1	SH	36"x72"	Recessed	Pella	No	Preserve Series
C	Wood	1/1	SH	36"x72"	Recessed	Pella	No	Preserve Series
D	Wood	1/1	SH	36"x72"	Recessed	Pella	No	Preserve Series
E	Wood	1/1	SH	36"x72"	Recessed	Pella	No	Preserve Series
F	Wood	1/1	SH	36"x72"	Recessed	Pella	No	Preserve Series
G	Wood	1/1	SH	36"x72"	Recessed	Pella	No	Preserve Series
H	Wood	1/1	SH	36"x72"	Recessed	Pella	No	Preserve Series
I	Wood	1/1	SH	36"x72"	Recessed	Pella	No	Preserve Series
J	Wood	1/1	Sh	36"x36"	Recessed	Pella	No	Preserve Series

- Must include photos of all windows and indicated damage
- Must include specification sheet and manufacture's details for all proposed new windows

****Use additional sheets if necessary**


Pella® Reserve™

Traditional Wood & Clad/Wood



Exquisitely designed windows and doors with unparalleled historical detailing.

Double-Hung Interior

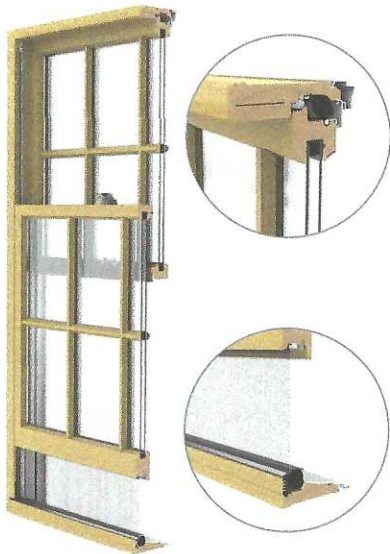


Double-Hung Exterior



- Easy-to-learn Pella Steady Set® interior installation system**
 Pella Steady Set Interior Installation System is a revolutionary, award-winning and safer way to install new construction windows.¹ The simple system is the fastest, most labor efficient wood window installation system with uncompromising quality.² Available on select windows.
- Historical Details**
 Our most historically authentic line of wood windows and patio doors. Featuring through-stile construction, deliberate proportions and intricate profiles. Pella Reserve – Traditional products are the ideal choice for historical renovations and traditional building projects.
- Authentic hardware**
 Complement your project with historically authentic spoon-lock window hardware. Our Antiek casement window hardware is inspired by period furniture to deliver authentic traditional style.
- Architectural interest**
 Pella's Integral Light Technology® grille helps capture the look of true-divided-light without sacrificing energy performance. Further your aesthetic with the putty profile, recreated with historically accurate angles to provide meaningful depth and a realistic shadow. Pella Reserve products offer the industry's deepest sash dimension.
- Virtually unlimited customization**
 If you can dream it, we can build it with our most customizable product line. From extra tall to extra wide, Pella can craft unique windows that complement your aesthetic. Custom sizes, grille patterns and designs, finishes, wood types and glass options are available.
- Tailor-made solutions**
 From preliminary drawings to installation, Pella's expert team of architects, engineers, drafters and consultants can work to deliver custom window and door solutions for your project. Partner with Pella to achieve your unique vision without concessions.
- Intentional innovation**
 The award-winning Integrated Rolscreen® retractable screen preserves aesthetics and the view. It is a double- and single-hung screen that appears when you open the window and rolls away, out of sight, when you close it.
- Durable interiors and extruded aluminum exteriors**
 To help you save time on the jobsite, interior finish options are available in a variety of colors, or primed and ready-to-paint. To complement your exterior aesthetic, choose from our carefully curated color palette or define your own custom color for your project.
- ENERGY STAR® certified³**
 Pella wood products offer energy-efficient options that will meet or exceed ENERGY STAR guidelines in all 50 states.
- Testing beyond requirements**
 All wood products and testing are not created equal. Pella raises the bar on industry standard testing and beyond to deliver long-lasting products and reduced callbacks. Every Pella wood window and door passes 5, on average, quality checks before it arrives on the jobsite.
- Best limited lifetime warranty⁴**
 Pella Reserve products are covered by the best limited lifetime warranty in the business for wood windows and patio doors.⁴

Available in these window and patio door styles:



Special shape windows also available.

^{1,2,3,4} See back cover for disclosures.



Pella® Reserve™ Traditional Precision-Fit Hung Window

Size and Performance Data

	Clad LX	Wood LX	Clad SE
Sizes			
Made to order in 1/4" increments	●	●	●
Cottage Sash or Equal Sash Split	●	●	●
Variable sash split	●	●	●
Performance			
Meets or Exceeds AAMA / WDMA Ratings	H-CW40 - CW50 Hallmark Certified	H-CW40 - CW-50 Hallmark Certified	H-CW40 - CW50 Hallmark Certified
Air Infiltration (cfm / ft ² of frame @ 1.57 psf wind pressure)	0.11	0.11	0.11
Water Resistance	6.0-6.9 psf	6.0-6.9 psf	6.0-6.9 psf
Design Pressure	40-50 psf	40-50 psf	40-50 psf

(—) = Not Available

(1) Maximum performance for single unit when glazed with the appropriate glass thickness. See Design Data pages in this section for specific product performance class and grade values.

(2) ASTM E 1425 defines standard sizes for acoustical testing. Ratings achieved at that size are representative of all sizes of the same configuration.



Pella® Reserve™ Traditional Precision-Fit Hung Window

Features and Options


Standard	Options / Upgrades
Glazing	
Glazing Type	
Dual-Pane Insulating Glass	—
Insulated Glass Options/Low-E Types	
Advanced Low-E	SunDefense™ Low-E
	SunDefense+ Low-E
	AdvancedComfort Low-E
	NaturalSun Low-E
	NaturalSun+ Low-E
	Clear (no Low-E coating)
Additional Glass Options	
Annealed Glass	Tempered Glass
	Obscure Glass ¹
	Tinted Glass (Bronze, Gray and Green)
Gas Fill/High Altitude	
Argon	High altitude
Exterior	
EnduraClad® protective finish	EnduraClad Plus protective finish
Factory Primed Wood Sash (pine, Aluminum-clad frame)	Unfinished Mahogany Wood (LX only)
Interior	
Wood Types	
Pine	Mahogany (clad and wood LX only), Douglas Fir (clad LX only)
Interior Finish	
Unfinished Wood	Factory primed ¹ , Factory prefinished paint ¹ , Factory prefinished stain ¹
Hardware	
Hardware Finish	
Champagne, White, Brown or Matte Black	Satin Brass, Satin Nickel, Oil-Rubbed Bronze
Sash Locks	
Cam-action lock	Historical spoon-style lock (surface mounted)
Tilt-Wash Cleaning	
Tilt to interior on both sashes	—
Other Hardware	
—	Sash lifts
Grilles	
Integral Light Technology® Grilles	
—	Traditional, Prairie, Top Row, Cross, New England, Victorian, Diamond, Custom
Grilles-Between-the-Glass	
—	Traditional, Prairie, Top Row ¹ , Cross or Custom-Equally Divided
Screens	
—	Full-Height or Half-height InView™ screens

(1) Contact your local Pella sales representative for current color options.



Pella® Reserve™ Traditional Precision-Fit Hung Window

Size and Measurement Guidelines



Interior view shown.

Refer to unit cross sections in this section for Make Width and Make Height dimensions.

Make Dimensions

Minimum

13-1/2" W x 23-3/4" H
(343 x 603)



Maximum

48" W x 84" H
(1 219 x 2 134)


Make Width (MW) = A - 1/2" (rounded to the nearest 1/4")

Make Height (MH) = B - 1/2" (rounded to the nearest 1/4")

Cottage Sash windows must be between ≥ 40-1/2" and ≤ 71-1/2" make height.




Shaded portion shows vent area.



Standard DH - Equal Sash Only - Standard Rail/Stile widths

Vent Units	
Visible Glass	Width = Frame - 5.647"
	Height = ((Frame - 8.6875) ÷ 2) - .75"
Actual Glass	Width = Frame - 4.375"
	Height = ((Frame - 5.983) ÷ 2) - .75
Clear Opening	COW = Frame Width - 3.6875"
	(Frame Height ÷ 2) - 5.1875"
Vent Area	(COW x COH) ÷ 144

Measurement guidelines

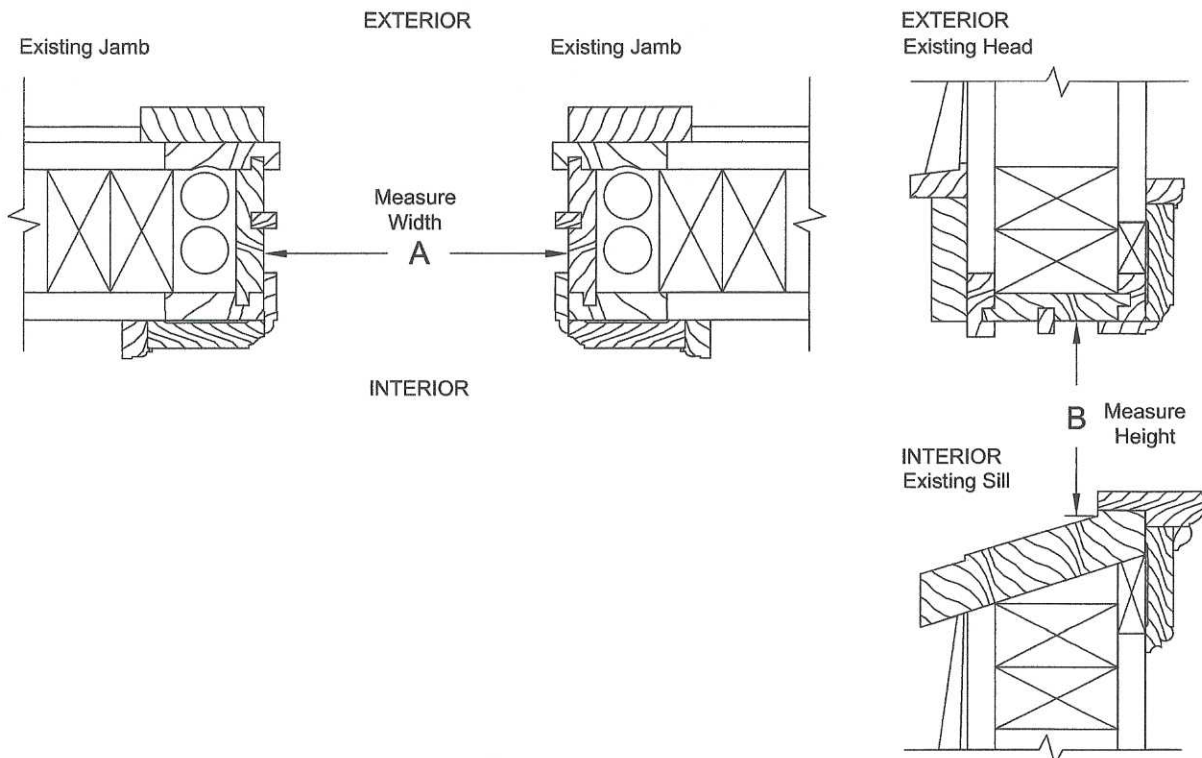



Pella® Reserve™ Traditional Precision-Fit Hung Window

Detailed Product Description - Aluminum-Clad Exterior

Frame

- Select softwood, immersion treated with Pella's EnduraGuard® wood protection formula in accordance with WDMA I.S.-4. The EnduraGuard formula includes three active ingredients for protection against the effects of moisture, decay, stains from mold and mildew. Plus, an additional ingredient adds protection against termite damage.
- Interior exposed surfaces are [clear pine] [mahogany] [douglas fir].
- Exterior surfaces are clad with aluminum.
- Components are assembled with screws, staples and concealed corner locks.
- Pocket depth is 3-1/4" (83mm).
- Vinyl jamb liner, includes wood/clad inserts.

Sash

- Select softwood, immersion treated with Pella's EnduraGuard® wood protection formula in accordance with WDMA I.S.-4. The EnduraGuard formula includes three active ingredients for protection against the effects of moisture, decay, stains from mold and mildew. Plus, an additional ingredient adds protection against termite damage.
- Interior exposed surfaces are [LX: [clear pine] [mahogany] [douglas fir]] [SE: clear pine].
- Exterior surfaces are clad with extruded aluminum butt-jointed at all corners of the sash with through-stile construction and sealed.
- Sash thickness is 1-7/8" (47mm).
- Sash exterior profile is [ogee] [putty glaze], interior profile is ogee.
- [Double-Hung: Upper sash has surface-mounted wash locks].
- Lower sash has concealed wash locks in lower check rail.
- Sashes tilt for easy cleaning.

Weatherstripping

- Water-stop Santoprene-wrapped foam at head and sill.
- Thermoplastic elastomer bulb with slip-coating set into lower sash for tight contact at check rail.
- Kerf mounted bristle weatherstrip at sill.
- Vinyl-wrapped foam inserted into jamb liner to seal against sides of sash.

Glazing System

- Quality float glass complying with ASTM C 1036.
- Custom and high altitude glazing available.
- Silicone-glazed 11/16" dual-seal insulating glass [[annealed] [tempered]] [[clear] [[Advanced] [SunDefense™] [SunDefense+] [AdvancedComfort] [NaturalSun] [NaturalSun+] Low-E [with argon]] [[bronze] [gray] [green] Advanced Low-E with argon].

Exterior

- Aluminum clad exteriors shall be finished with EnduraClad® protective finish, in a multi-step, baked-on finish.
 - Color is [standard] [feature] [custom]₂
 - or –
- Aluminum clad exteriors shall be finished with EnduraClad Plus protective finish with 70% fluoropolymer resin in a multi-step, baked-on finish.
 - Color is [standard] [feature] [custom]₂

Interior

- [Unfinished, ready for site finishing] [factory primed with one coat acrylic latex] [pine: factory prefinished [paint] [stain]₂].

Hardware

- Galvanized block-and-tackle balances are connected to self-locking balance shoes which are connected to the sashes using zinc die cast terminals and concealed within the frame.
- Sash lock is [standard] [historic spoon-style]. Two sash locks on units with make width 37" and greater.
- Optional Sash lift furnished for field installation. Two lifts on units with make width 37" and greater.
- Hardware finish is [baked enamel [Champagne] [White] [Brown] [Matte Black]] [Satin Brass] [Satin Nickel] [Oil-rubbed Bronze] [Distressed Bronze] [Distressed Nickel].

Optional Products

Grilles

- Integral Light Technology® grilles
 - Interior grilles are [5/8"] [7/8"] [1-1/4"] ogee profile that are solid [LX: [pine] [mahogany] [douglas fir]] [SE: pine]. Interior surfaces are [unfinished, ready for site finishing] [factory primed] [pine: factory prefinished [White] [Linen White] [Bright White] [stain]₂].
 - Exterior grilles are [5/8" putty glaze profile] [7/8" [putty glaze] [ogee] profile] [1-1/4" [putty glaze] [ogee] profile] that are extruded aluminum.
 - Patterns are [Traditional] [Prairie] [Top Row] [New England] [Victorian].
 - Insulating glass contains non-glare spacer between the panes of glass.
 - Grilles are adhered to both sides of the insulating glass with VHB acrylic adhesive tape and aligned with the non-glare spacer.
 - or –

Grilles-Between-the-Glass₃

- Insulating glass contains 3/4" contoured aluminum grilles permanently installed between two panes of glass.
- Patterns are [Traditional] [9-Lite Prairie] [Cross] [Top Row]
- Interior color is [White] [Tan₄] [Brown₄] [Putty₄] [Black] [Ivory] [Harvest] [Cordovan] [Brickstone].
- Exterior color₅ is [standard]₂.

Screens

- InView™ Screens
 - [Half-Size] [Full-Size] black vinyl-coated 18/18 mesh fiberglass screen cloth complying with the performance requirements of SMA 1201, set in a [extruded] [standard] aluminum frame fitted to outside of window, supplied complete with all necessary hardware.
 - Spreader bar placed on units > 37" width or 64-1/4" make height.
 - Screen frame finish is baked enamel, color to match window cladding.

Hardware

- Optional factory applied limited opening device available for vent units in stainless steel; nominal 3-3/4" opening. Limiting device concealed from view.
- Optional window opening control device available for field installation. Device allows window to open less than 4" with normal operation, with a release mechanism that allows the sash to open completely. Complies with ASTM F2090-10.

(1) Low-E coated insulating glass is argon-filled (except high altitude). All other insulating glass (including high altitude Low-E) is air-filled.

(2) Contact your local Pella sales representative for current color options.

(3) Available in clear or Low-E insulating glass only.

(4) Tan, Brown and Putty Interior GBG colors are available in single-tone (Brown/Brown, Tan/Tan or Putty/Putty). Other interior colors are also available with Tan or Brown exterior.

(5) Appearance of exterior grille color will vary depending on Low-E coating on glass.



Pella® Reserve™ Traditional Precision-Fit Hung Window

Detailed Product Description - Wood Exterior Sash

Frame

- Select softwood, water-repellent, preservative-treated with EnduraGuard® triple wood protection in accordance with WDMA I.S.-4. EnduraGuard triple protection formula includes water-repellency, three active fungicides and an insecticide applied to the frame.
- Interior exposed surfaces are [pine] [mahogany].
- Exterior surfaces are clad with aluminum.
- Pocket depth is 3-1/4" (83mm).
- Vinyl Jamb liner includes wood / clad inserts.

Sash

- Select softwood, water-repellent, preservative-treated with EnduraGuard triple wood protection in accordance with WDMA I.S.-4. EnduraGuard triple protection formula includes water-repellency, three active fungicides and an insecticide applied to the sash.
- Interior exposed surfaces are [pine] [mahogany].
- Exterior surfaces are [pine] [mahogany].
- Sash thickness is 1-13/16" (46mm).
- Sash exterior profile is putty glaze, interior profile is ogee.
- Upper sash has surface-mounted wash locks.
- Lower sash has concealed wash locks in lower check rail.
- Sashes tilt for easy cleaning.

Weatherstripping

- Water-stop Santoprene-wrapped foam at head and sill.
- Thermoplastic elastomer bulb with slip-coating set into lower sash for tight contact at check rail.
- Kerf mounted bristle weatherstrip at sill.
- Vinyl-wrapped foam inserted into jamb liner or jamb liner components to seal against sides of sash.

Glazing System

- Quality float glass complying with ASTM C 1036.
- Custom and high altitude glazing available.
- Silicone-glazed 11/16" dual-seal insulating glass [[annealed] [tempered]] [[clear] [Advanced] [SunDefense™] [SunDefense+] [AdvancedComfort] [NaturalSun] [NaturalSun+] Low-E [with argon]] [[bronze] [gray] [green] Advanced Low-E with argon].

Exterior

- [Pine: factory primed with one coat acrylic latex] [Mahogany: [factory primed with one coat acrylic latex] [Unfinished, ready for site finishing]].

Interior

- [Unfinished, ready for site finishing] [factory primed with one coat acrylic latex] [pine: factory prefinished [White] [Linen White] [Bright White] [stain₂]].

Hardware

- Galvanized block-and-tackle balances are connected to self-locking balance shoes which are connected to the sashes using zinc die cast terminals and concealed within the frame.
- Sash lock is [standard] [historic spoon-style]. Two sash locks on units with make width 37" and greater.
- Optional Sash lift furnished for field installation. Two lifts on units with make width 37" and greater.
- Hardware finish is [baked enamel [Champagne] [White] [Brown] [Matte Black]] [satin brass] [satin nickel] [oil-rubbed bronze] [distressed bronze] [distressed nickel].

Optional Products

Grilles

- Integral Light Technology® grilles
 - Interior grilles are [5/8"] [7/8"] [1-1/4"] ogee profile that are solid [pine] [mahogany]. Interior surfaces are [unfinished, ready for site finishing] [factory primed] [pine: factory prefinished [White] [Linen White] [Bright White] [stain₂]].
 - Exterior grilles are [5/8"] [7/8"] [1-1/4"] putty glaze profile [pine] [mahogany], water repellent, preservative-treated in accordance with WDMA I.S.-4, and are factory primed.
 - Patterns are [Traditional] [Prairie] [Top Row] [New England] [Victorian].
 - Insulating glass contains non-glare spacer between the panes of glass.
 - Grilles are adhered to both sides of the insulating glass with VHB acrylic adhesive tape and aligned with the non-glare spacer.
- or -

Grilles-Between-the-Glass₃

- Insulating glass contains 3/4" contoured aluminum grilles permanently installed between two panes of glass.
- Patterns are [Traditional] [9-Lite Prairie] [Cross] [Top Row]
- Interior color is [White] [Tan₄] [Brown₄] [Putty₄] [Black] [Ivory] [Harvest] [Cordovan] [Brickstone].
- Exterior color₅ is [standard₂].

Screens

- InView™ Screens
 - [Half-Size] [Full-Size] black vinyl-coated 18/18 mesh fiberglass screen cloth complying with the performance requirements of SMA 1201, set in a [extruded] [standard] aluminum frame fitted to outside of window, supplied complete with all necessary hardware.
 - Spreader bar placed on units > 37" width or 64-1/4" make height.
 - Screen frame finish is baked enamel, color to match window cladding.

Hardware

- Optional factory applied limited opening device available for vent units in stainless steel; nominal 3-3/4" opening. Limiting device concealed from view.
- Optional window opening control device available for field installation. Device allows window to open less than 4" with normal operation, with a release mechanism that allows the sash to open completely. Complies with ASTM F2090-10.

(1) Low-E coated insulating glass is argon-filled (except high altitude). All other insulating glass (including high altitude Low-E) is air-filled.

(2) Contact your local Pella sales representative for current color options.

(3) Available in clear or Low-E insulating glass only.


(4) Tan, Brown and Putty Interior GBG colors are available in single-tone (Brown/Brown, Tan/Tan or Putty/Putty). Other interior colors are also available with Tan or Brown exterior.

(5) Appearance of exterior grille color will vary depending on Low-E coating on glass.



Pella® Reserve™ Traditional Precision-Fit Hung Window

Unit Section - Aluminum-Clad Exterior Ogee Exterior Glazing Profile

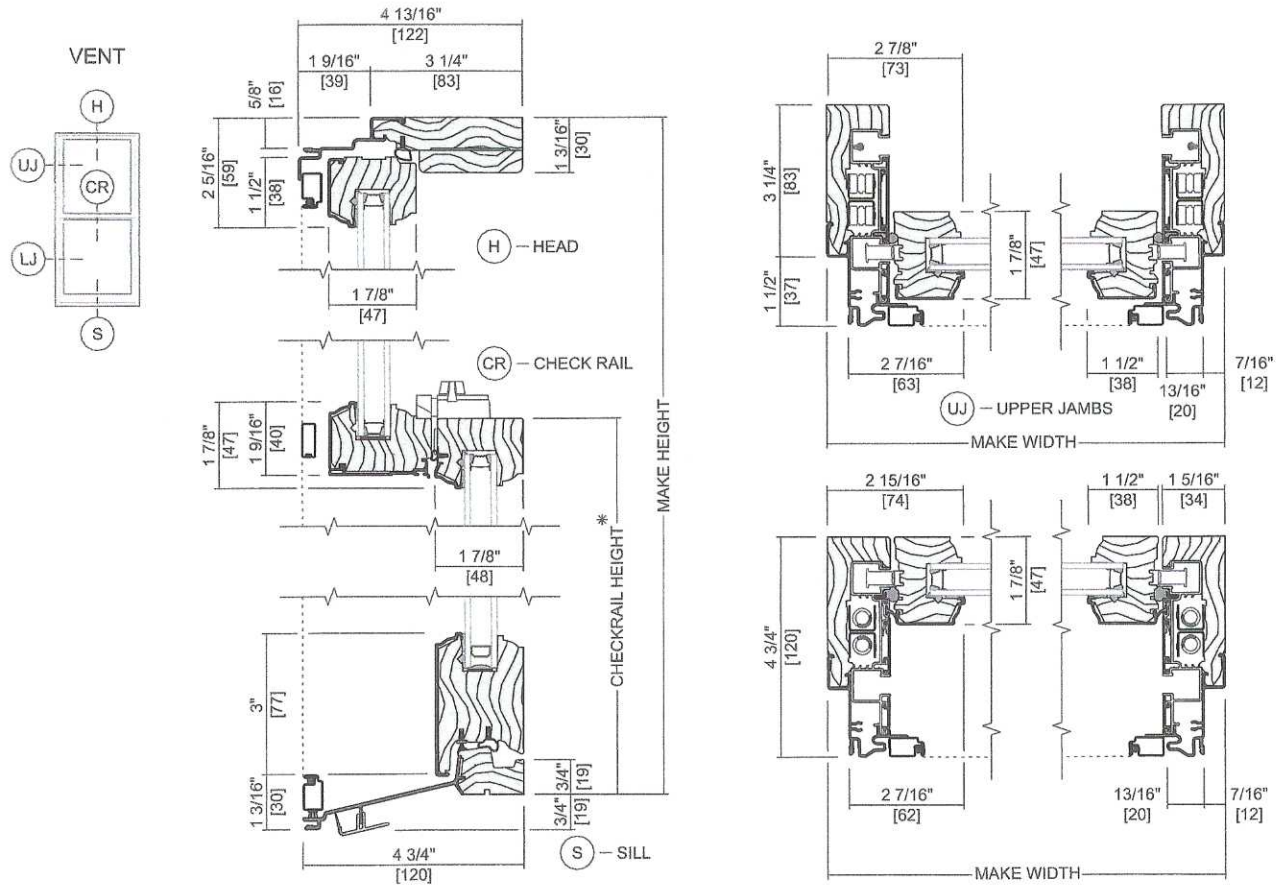


Scale 3" = 1' 0"

All dimensions are approximate.




Pella® Reserve™ Traditional Precision-Fit Hung Window


Installation Details - Aluminum-Clad Exterior

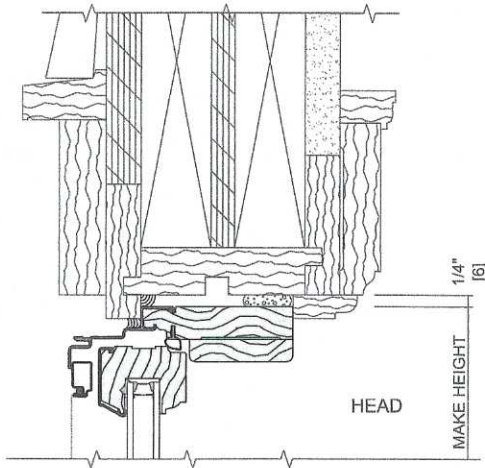

NOTE:
WALL CONSTRUCTION AND OLD DOUBLE-HUNG FRAME SHOWN ARE EXISTING; OLD DOUBLE-HUNG SASH HAS BEEN REMOVED. REFER TO THE APPROPRIATE PELLA INSTALLATION INSTRUCTION FOR COMPLETE STEP BY STEP INSTRUCTIONS. SHIM AND PLUMB UNITS AS REQUIRED. SEAL UNIT TO EXTERIOR / BLIND STOP.

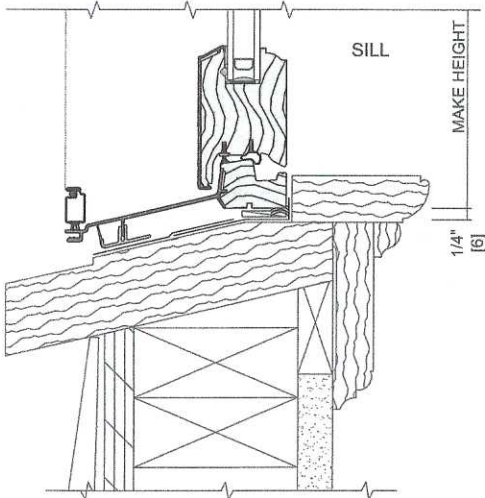

SEAL THE UNIT TO EXISTING STOOL AND WINDOW SILL. SEAL ADJUSTABLE SILL ADAPTER TO EXISTING WOOD SILL. LEVEL UNITS AS REQUIRED.

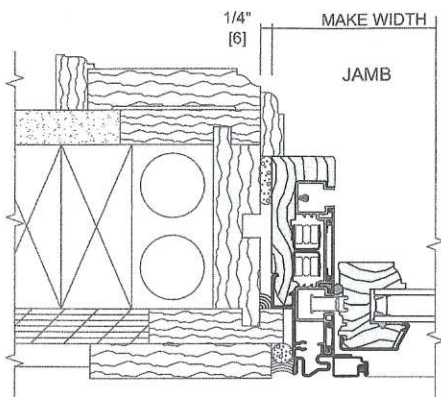

NOTE:
THE ADJUSTABLE SILL ADAPTER MAY BE REMOVED WHEN THE EXISTING WINDOW SILL HAS A SLOPE OF 12 DEGREES OR LESS.

INSULATE ALL VOIDS AT WINDOW PERIMETER (BY OTHERS). SEAL UNIT TO EXTERIOR / BLIND STOP.


Scale 3" = 1' 0"

All dimensions are approximate.



Pella® Reserve™ Traditional Precision-Fit Hung Window

Unit Section - Aluminum-Clad Exterior Putty Exterior Glazing Profile

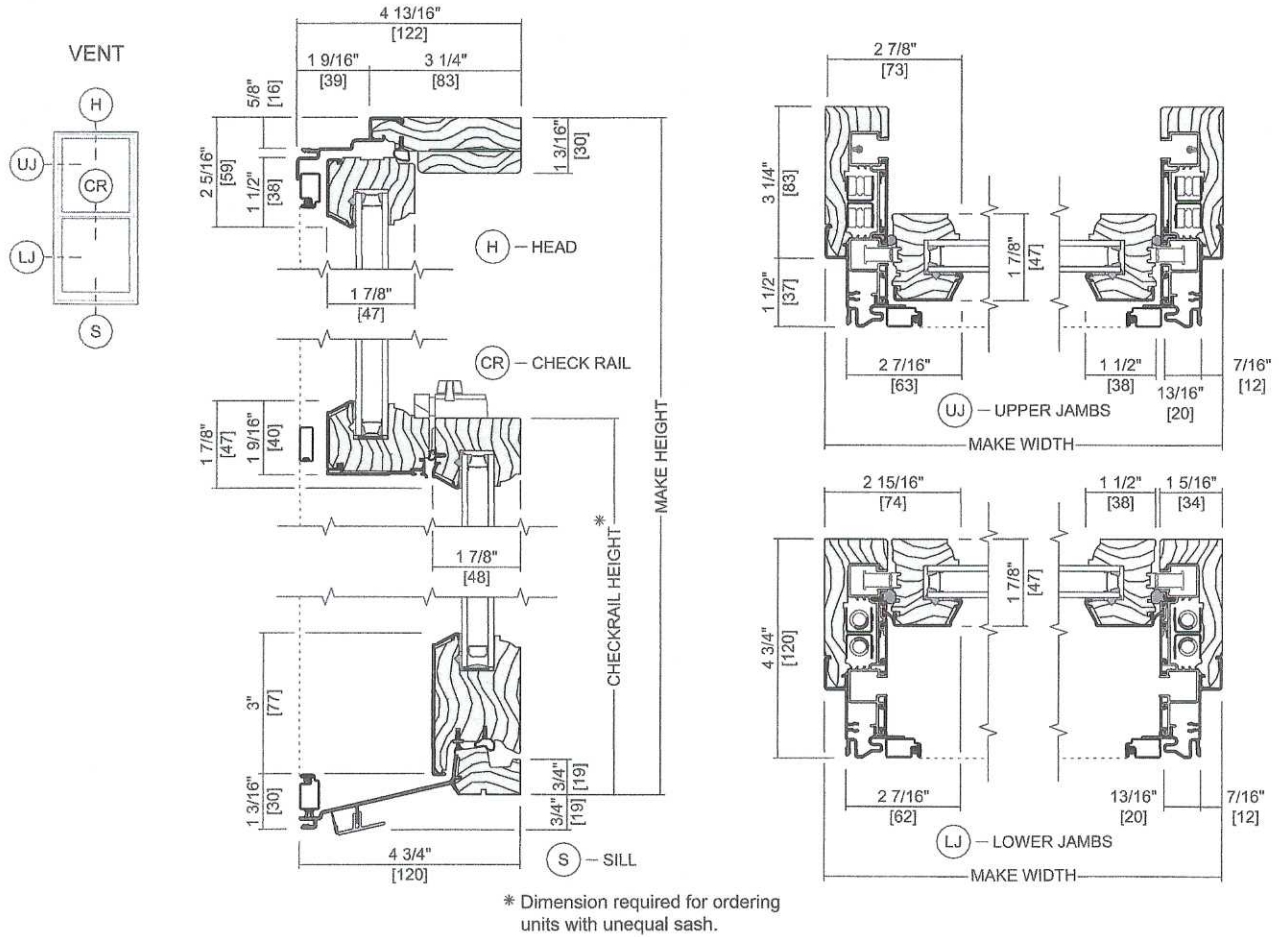

Scale 3" = 1' 0"


All dimensions are approximate.

Trex Select® decking comes in nature inspired colors that pairs smartly with any home, and offers a splinter-free finish.

DECKING PROFILES

1" Square-Edge Board

Our square edge boards are installed with deck screws, similar to traditional wood install.




ACTUAL SIZE & METRICS: .94 in x 5.5 in x 12 ft / 16 ft / 20 ft (24 mm x 140 mm x 365 cm / 487 cm / 609 cm)



2" Square-Edge Board

Available in all Trex Select® colors




ACTUAL SIZE & METRICS: 1.3 in x 5.5 in x 12 ft / 16 ft / 20 ft (33 mm x 140 mm x 365 cm / 487 cm / 609 cm)



1" Grooved-Edge Board

Our grooved-edge boards install with our Hidden Fastener System beneath the deck surface, leaving a tidy finish free of screw holes.



ACTUAL SIZE & METRICS: .82 in x 5.5 in x 12 ft / 16 ft / 20 ft (24 mm x 140 mm x 365 cm / 487 cm / 609 cm)



FASCIA PROFILES

1" x 8" Fascia Board

Use as deck trim, stair raisers and deck skirts for a long-lasting, beautifully finished look.



ACTUAL SIZE & METRICS: .56 in x 7.25 in x 12 ft (14 mm x 184 mm x 365 cm)



1" x 12" Fascia Board

Use as deck trim, stair raisers and deck skirts for a long-lasting, beautifully finished look.



ACTUAL SIZE & METRICS: .56 in x 11.375 in x 12 ft (14 mm x 288 mm x 365 cm)



TREX SELECT® COLORS



FIRE RESISTANT DECKING

Boards with these symbols are Wildland Urban Interface (WUI) compliant, making them an excellent option for areas prone to wildfires.



TREX HIDEAWAY® HIDDEN FASTENER SYSTEM

The fastener system delivers universal deck hidden fasteners, color-match decking and fascia screws, decking and fascia plugs, butt-joint clips, and starter clips. For a full list of approved fasteners, download our Installation Guide at trex.com/literature.



MARINE-GRADE STRENGTH

All Trex Select® decking is engineered for harsh waterfront conditions with materials that withstand full submersion, salt, and constant moisture.



SUNCOMFORTABLE™ HEAT-MITIGATING* TECHNOLOGY

With SunComfortable™ Technology, we've achieved a major innovation, reducing heat buildup by up to 35°F* compared to our original boards.

*Trex SunComfortable™ decking stays cooler than our original boards, but like all decking, it will get hot in direct sun on hot days, especially darker colors. Care should be taken to avoid extended contact between exposed skin and the deck surface, especially with young children and those with special needs.

*Based on laboratory testing simulating direct full summer sun exposure over an extended period. Colors used are Lava Rock (without SunComfortable) and Salt Flat (with SunComfortable). Actual temperature reduction may vary depending on environmental conditions, color and usage. Trex decking with SunComfortable technology will still get hot when high temperatures and sun converge. Care should be taken on such days to avoid extended contact between exposed skin and the deck surface.



VISIT [TREX.COM](https://trex.com) OR CALL 1-800-BUY-TREX

To learn more about installation requirements and accessories, download our Installation Guide at trex.com/literature

For more details about Trex Select® Decking, explore the particulars at trex.com/products/decking/select/

© 2026 Trex Company, Inc. All rights reserved. 04.26.

Scan to
view the
master
SKU list



Rare Historical Vintage Antique Coffeyville VB & T CO. Brick Coffeyville, KS

Item specifics

Color: Red

Decade: 1900s

Original/Reproduction: Antique Original

Material: Red Clay

Features: Reclaimed

Maker: Coffeyville Shale & Brick Co.

Country of Origin: United States


This rare historical vintage antique brick from Coffeyville, KS is a true gem for collectors and enthusiasts alike. With its vibrant red color and intricate design, this piece is a testament to the rich history of the area. The brick is made of high-quality red clay and features the Coffeyville Shale & Brick Co. maker's mark, adding to its value and authenticity.

The antique original brick is a reclaimed piece from the 1900s and has been well-preserved over the years, making it a great addition to any collection or display. This brick was excavated from a road in Galveston, Texas after hurricane IKE. Its unique features and maker's mark make it a must-have for anyone interested in architectural preservation.





Historic Window Standard: New Construction & Replacement

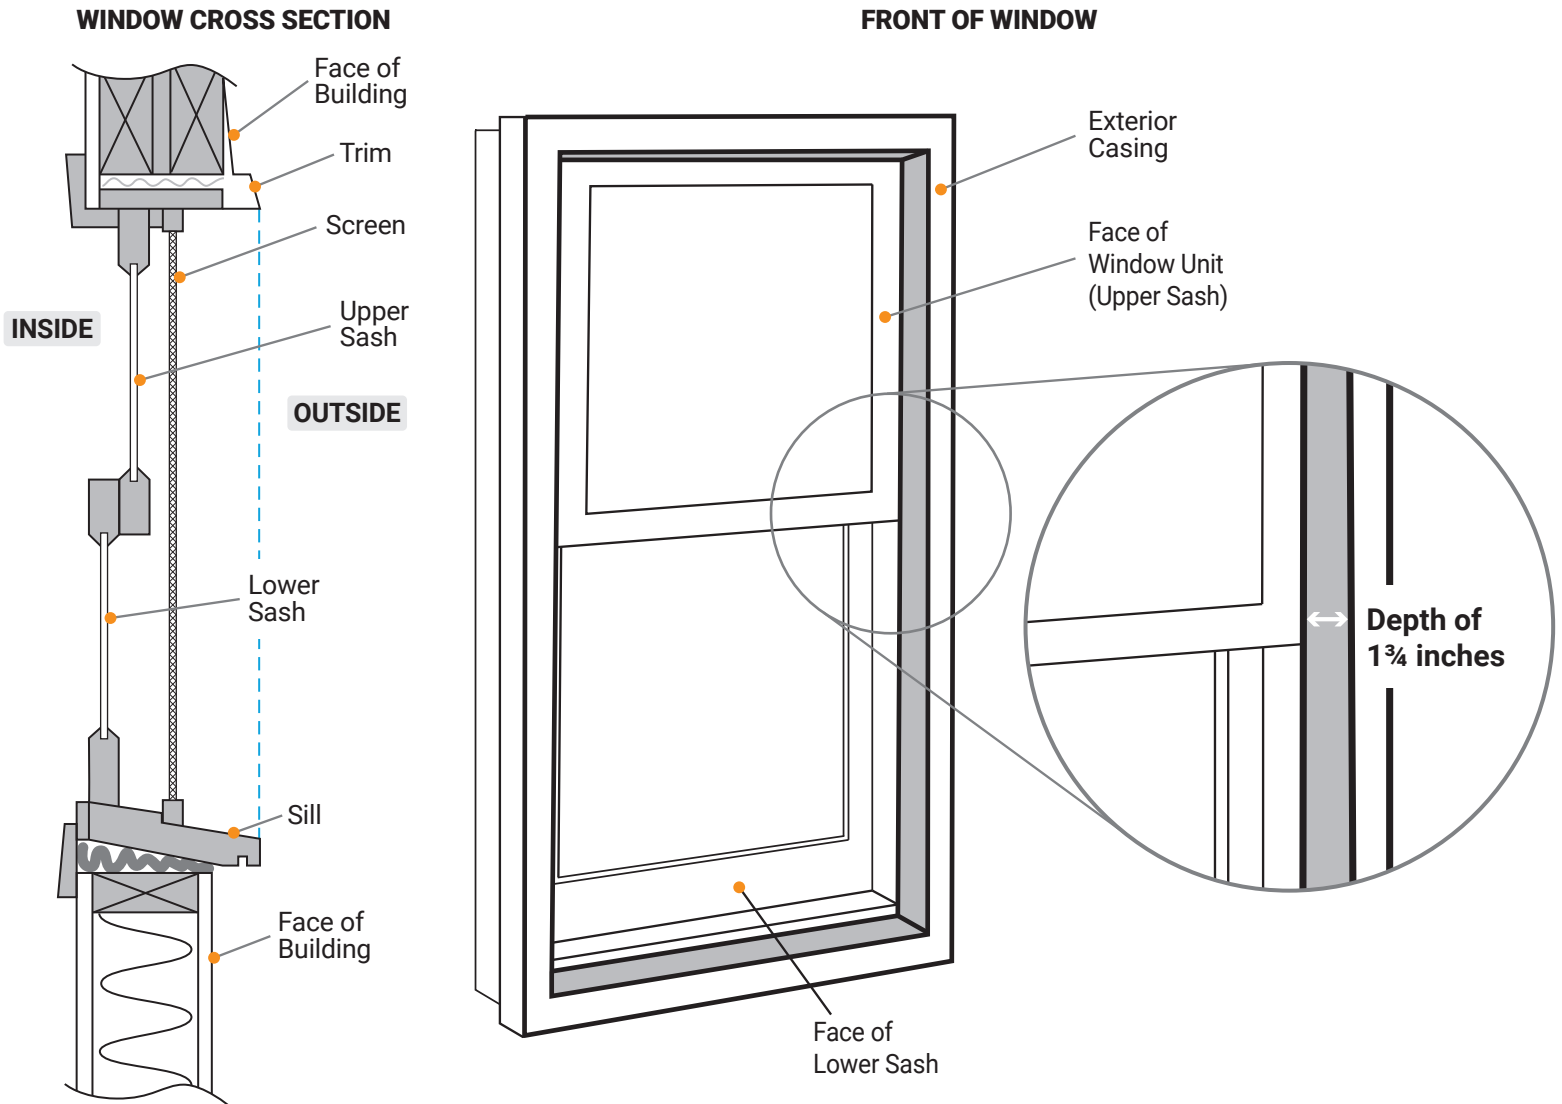

Minimum 1³/₄ inch Inset

- Depth from Exterior Casing to the Face of the Window Unit (Upper Sash)
- Windows must be 1-over-1 (equally horizontally divided)
- 1³/₄ inch minimum inset for Fixed Window

For more information contact: Houston Office of Preservation



832-393-6556



historicpreservation@houstontx.gov